


Commercial Continuous Flow Gas Water Heater Series



ECO30i



6.9star*

97.98%
Efficiency

ECO30e




6.5star*

95.40%
Efficiency

* Independently calculated using Australian Standard AS4552. AS4552 limits the rating shown on the energy label to 6.0 Stars. Where the calculated rating of the appliances exceeds 6.0 Stars it is designated as an "equivalent" rating.


AQUA28e



5.6star


84.80%
Efficiency

AQUA28i



5.8star

85.57%
Efficiency

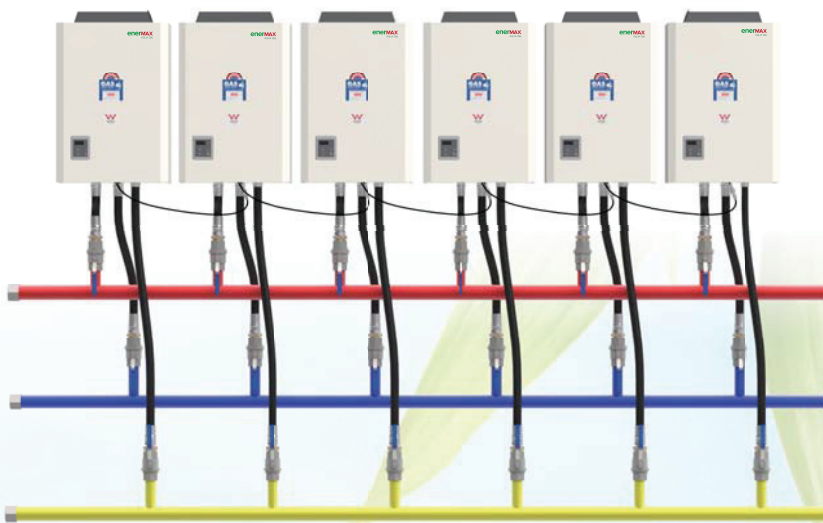

- Built-in temperature setting controller
- Available output temperature setting: 36°C ~ 75°C
- Easy cascade connection and operation
- ✓ Indoor unit--SUS304 coaxial flue design

IP23



Model No.	Installation	Flow (l/min.) @ ΔT 20°C	Flow (l/min.) @ ΔT 25°C	Flow (l/min.) @ ΔT 35°C	Flow (l/min.) @ ΔT 40°C	Flow (l/min.) @ ΔT 50°C	Flow (l/min.) @ ΔT 60°C	Gas Rate MJ/hr
ECO30e Condensing	Outdoor	38.0	30.4	21.7	19	15.2	12.6	200
ECO30i Condensing	Indoor	38.0	30.4	21.7	19	15.2	12.6	200
AQUA28e Non-Condensing	Outdoor	34.7	28	19.3	17	13.5	11.3	200
AQUA28i Non-Condensing	Indoor	34.7	28	19.3	17	13.5	11.3	200